



WHEELCHAIR RANGE

aspire for...

Comfort

Posture

Mobility



EVOKE 2



REHAB RX



ASSIST 2



TRANSIT 2



LITE TRANSIT

aspire EVOKE 2 **2** Lightweight & Highly Adjustable


The Aspire EVOKE 2 and EVOKE 2 HD are highly adjustable, lightweight, aluminium wheelchairs designed to enable a personalised fit for every user. A comprehensive range of compatible accessories is available for increased independence and enhanced clinical outcomes.



EVOKE 2 pictured with optional Contoured Padded Overlay

CONTOURED PADDED OVERLAY

The contoured padded overlay offers the user increased comfort and is ideal for those who are in their wheelchair for longer periods of time. The mild contouring assists in positioning and pressure distribution, while the fabric allows air movement, increasing breathability. It is easily removed to allow washing when required.

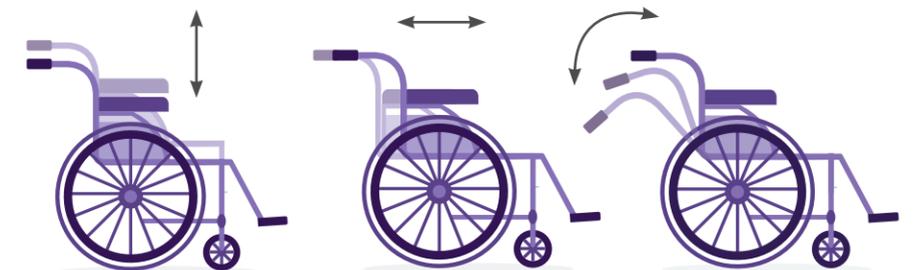

SEAT & BACKREST HEIGHT ADJUSTABLE

SEAT DEPTH ADJUSTABLE

BACKREST ANGLE ADJUSTABLE

HIGHLY ADJUSTABLE

The wide array of adjustable features fulfil many clinical requirements and are geared towards independence and comfort:



- Seat Depth
- Seat Height
- Backrest Height
- Backrest Angle
- Backrest Tension
- Rear Wheel Height
- Rear Wheel Depth
- Castor Height
- Castor Angle
- Footplate Height & Angle
- Swing Back Removable Arms
- Height and Depth Adjustable Arm Pads (tools required)



Cushion included as standard


CUSTOMISABLE BACKREST

- ✓ Tension Adjustable
- ✓ Angle Adjustable
- ✓ Height Adjustable

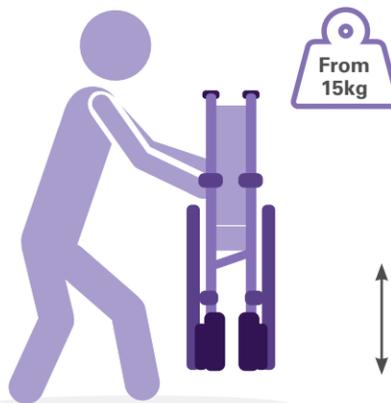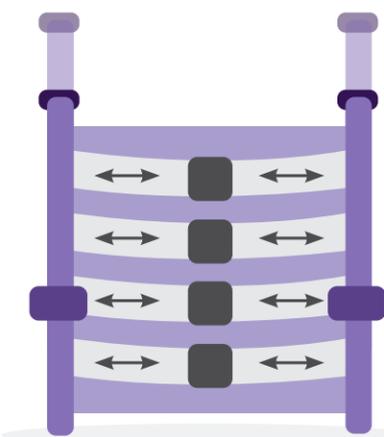

LIGHTWEIGHT DESIGN

The sleek, lightweight frame puts manoeuvrability and handling at the forefront of this design, allowing responsive handling and easy lifting. Camber kit available to upgrade handling and balance for highly active users.

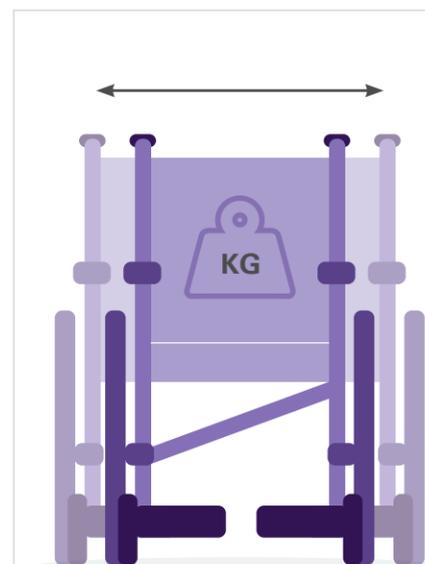

IMPRESSIVE SAFE WORKING LOAD (S.W.L)

140kg: Seat widths 350-500mm
180kg (HD): Seat widths 570 - 610mm

- ✓ DVA Contracted
- ✓ AS / NZS Approved
- ✓ Evoke is registered in the ARTG, AUSTR ARTG 291670



SEAT WIDTH	CODE
350 mm (14")	MWS449500
400 mm (16")	MWS449510
450 mm (18")	MWS449520
500 mm (20")	MWS449530
570 mm (22")	MWS449540 (HD Model)
610 mm (24")	MWS449550 (HD Model)